

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/102336 A1(51) International Patent Classification⁷: E05B 73/00

(21) International Application Number: PCT/SE03/00902

(22) International Filing Date: 4 June 2003 (04.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0201683-0 4 June 2002 (04.06.2002) SE(71) Applicant (for all designated States except US): MW
SECURITY AB [SE/SE]; Krossverksgatan 3, S-216 16
Limhamn (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HOLMGREN, Bertil
[SE/SE]; Rång Sandsvägen 59, S-235 91 Vellinge (SE).(74) Agents: LINDBERG, Olle et al.; c/o Albihtns Malmö AB,
P.O. Box 4289, S-203 14 Malmö (SE).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: ANTI-THEFT DEVICE

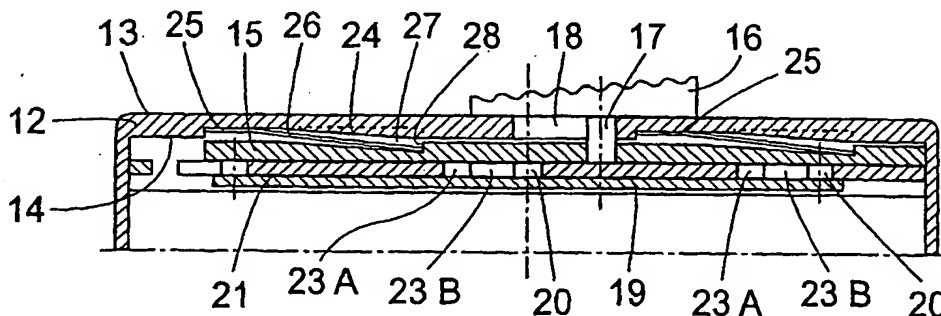

(57) Abstract: An anti-theft device comprising a container formed by a box (10) and a lid (11) hinged together. A lock slide (15) inside the box can be displaced between a disengaged position and an engaged position. A flange (22) on the lid forms an L-shaped slot. A first limb (23A) of the slot is perpendicular to a free edge of the flange and opens in said edge to receive a projection on the lock slide in the disengaged position thereof. A second limb (23B) of the slot extends transversely of the first limb to receive the projection when the lock slide is in the engaged position. A latch mechanism (26, 28) latching the lock slide in the engaged position can be actuated by means of a special tool to unlatch the lock slide and allow displacement thereof to the disengaged position.